

Installation Instructions

F17

For Rook Towel Ring 84-4003

CAUTION: FAILURE TO INSTALL THIS PRODUCT PROPERLY MAY RESULT IN PERSONAL INJURY OR PROPERTY DAMAGE. We recommend installation by a qualified individual trained in the building trade.


This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

To Install


Component Parts

- A Towel Ring
- B Set Screw
- C Wall Mount Plate
- D Screws (2)
- E Wall Anchors (2)

1. Remove wall mount plate (C) from towel ring (A) by loosening set screw (B) and sliding wall mount plate (C) from towel ring (A) (Figure 1).
2. Hold wall mount plate (C) in location where towel ring is to be mounted. With a pencil, mark the location of all mounting holes in the wall mount plate on the wall behind.
3. If attaching directly to a framing member skip this step. Put the wall mount plate down and drill 1/4" holes in the locations marked on the wall if wall anchors (E) are to be used. ***If directly attaching to a solid support the drilled hole is not needed.*** For holes using anchors, place the tapered end of the anchors (E) into the holes and gently tap them flush to the wall using a light weight hammer.
4. Install screws (D) through wall mount plate (C) and into each anchor. ***If anchors are not needed the screws (D) can be installed directly to the wall.***
5. Slip towel ring (A) onto wall mount plate (C) until it is against wall. *The towel ring can be mounted with the opening to the left or right depending on preference.*
6. Align towel ring (A) so it is straight and tighten set screw (B).

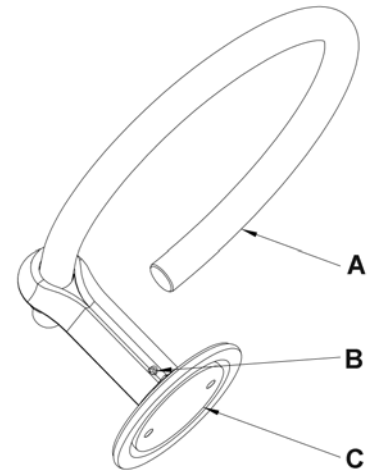

(Figure 1)

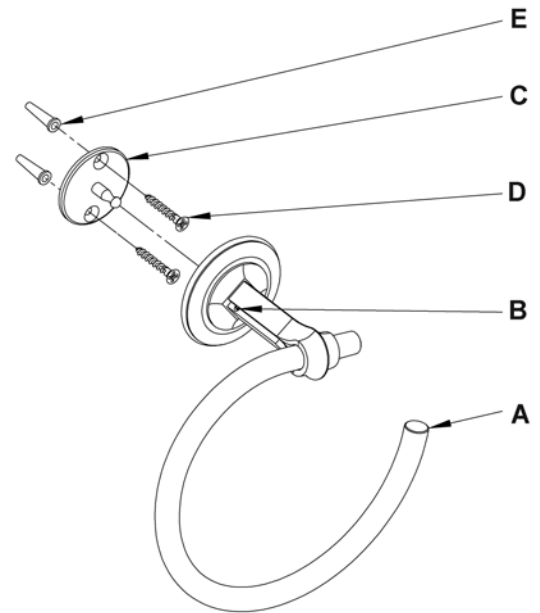

(Figure 2)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation or use of this fixture.