

Assembly & Installation Instructions

A394

Corona Semi-Flush 128712

Page 1 of 2

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

To Install Fixture (Figure 1)

Component Parts

- A Ground Screw
- B Crossbar
- C Threaded Stud (2)
- D Canopy
- E Knurled Balls (2)
- F Fixture
- G Safety Cable
- H #8 Screw

CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.

1. Carefully unpack the fixture from the carton.
2. Thread studs (C) through appropriate holes in cross bar (B) to match hole centers in canopy (D). Move ground screw (A) to another available threaded hole if necessary.
3. Using two machine screws (not provided) fasten cross bar (B) to the electric box using outer oval holes to orient fixture to desired hanging position.


Note: A new electric box comes with screws. When replacing an existing fixture, retain the screws for use with the new fixture.

4. 4. Raise fixture (F) close to ceiling. Attach safety cable (G) to crossbar (B) using #8 screw (H) found in kit bag. Temporarily suspend fixture using cable.

CAUTION: THE CABLE IS INTENDED TO TEMPORARILY SUSPEND THE FIXTURE TO HELP WITH INSTALLATION. NEVER DEPEND ON THEM TO SUPPORT FIXTURES WITH GLASS INSTALLED.

5. Using suitable wire connectors (not provided); connect fixture wires to supply wires (white to white and black to black). Run a pigtail lead from the ground screw (A) to the junction box and connect all ground wires (bare copper or green to bare copper or green).

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.

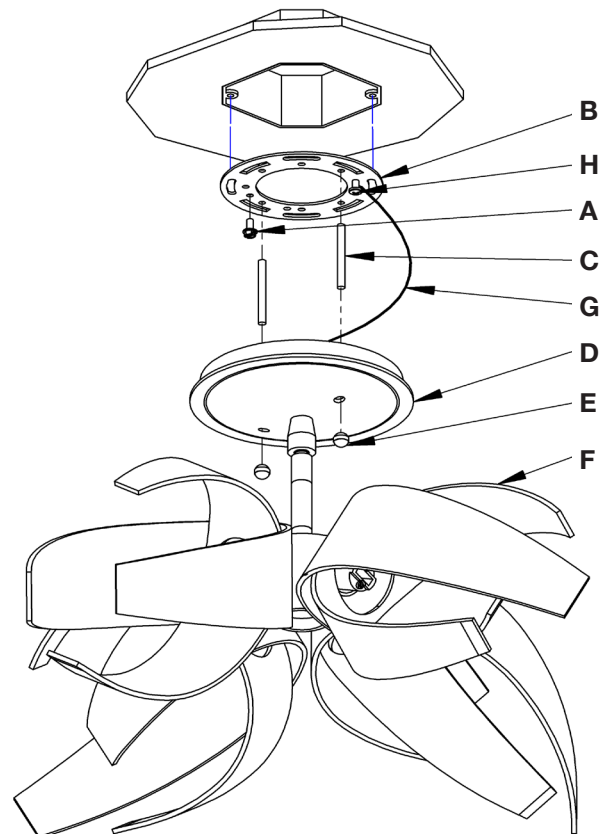

(Figure 1)

(Continued)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

Assembly & Installation Instructions

A394

Corona Semi-Flush 128712

Page 2 of 2

To Install Fixture (Figure 1)

Continued

- Slide fixture canopy (D) over threaded studs (C) and push firmly to ceiling, making sure that no wires are pinched between fixture canopy (D) and ceiling. Fasten with knurled balls (E). Be sure studs (C) are fully seated in knurled balls (E).

Install Glass (Figure 2)


Component Parts

- I Socket (4)
- J Bulb (4-included)
- K Glass (4)

- Install light bulbs (J). Be careful not to touch bulb with bare hands; oil from the hands will dramatically reduce bulb life.

Note: The bulb included is based on our design preference; see the fixtures wattage sticker for Max wattage information.

- Slip glass (K) over bulb (J) and thread onto socket until snug. Be careful not to over tighten.
- Restore electricity at the main breaker.

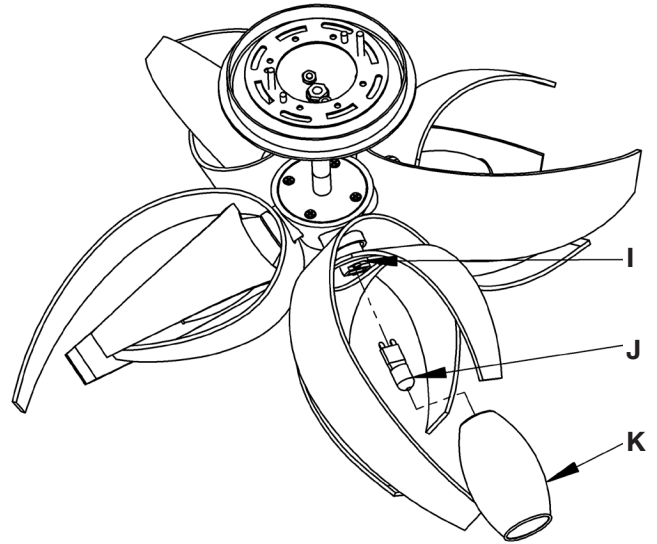

(Figure 2)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

***Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.**